


Hy-Speed Servo

Form-Fill-Seal Wrapper

Built for peak performance,
durability, and versatility.

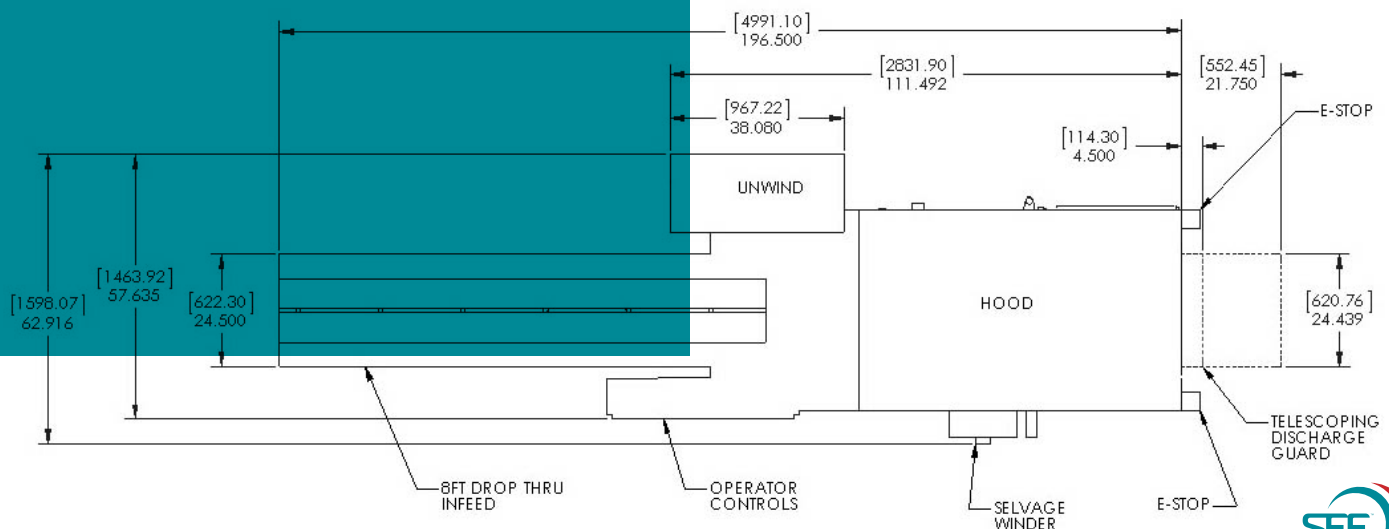

Shanklin® HySpeed Servo series Shrink Wrap Machines offer speed and flexibility to meet evolving production demands. The HS Servo 15 and 19 models offer many features that maximize uptime in the most demanding environments.

Shanklin® HSS machines can run any Sealed Air® brand shrink wrap film. They are available as a general-purpose painted steel or USDA-approved Stainless Steel construction.



KEY BENEFITS

- Automatically compensates for package length change
- Fast and dependable high-speed machine with fully automatic continuous flow operation
- Automatic film advance system allows light, flexible products to be fed through with ease
- Picture-based HMI touchscreen offers easy navigation for system operator
- Versatile, runs well at high *and low* speeds, and capable of handling a wide variety of packages
- Robust Hot Knife End Seal and Sabre Right Side Sealer maximizes uptime
- Corrective action screens offer recommendations to make adjustments clear and easy for the operator

TECHNICAL DATA

Shanklin HySpeed Servo 15

15" wide belt
19" wide end seal
Up to 8" jaw opening
Product width up to 16"
Belt speed up to 250 feet per minute
Up to 180 product per minute (product and film dependent)

Shanklin HySpeed Servo 19

19" wide belt
23" wide end seal
Up to 8" jaw opening
Product width up to 19"
Belt speed up to 250 feet per minute
Up to 180 product per minute (product and film dependent)

Both size models are available in stainless steel construction